



**CUSHMAN®**



# HAULER™ 4X4

**GAS POWER, BUILT TO GO ANYWHERE.**

By combining a robust 28-hp EFI gas engine with user-selectable 4WD and a 100-mile range, the Hauler 4x4 is armed to take on any task, anywhere. An industry-leading 800-lb cargo capacity can haul the heaviest loads, while 4-wheel independent suspension gives you a smooth ride no matter where the day takes you.

**LET'S WORK.®**

**28HP**  
SUBARU EFI  
GAS ENGINE

**4WD**  
USER  
SELECTABLE

**800LB**  
BED LOAD  
CAPACITY






# CUSHMAN® HAULER™ 4X4



3-POINT SEATBELTS &  
ROLLOVER PROTECTION

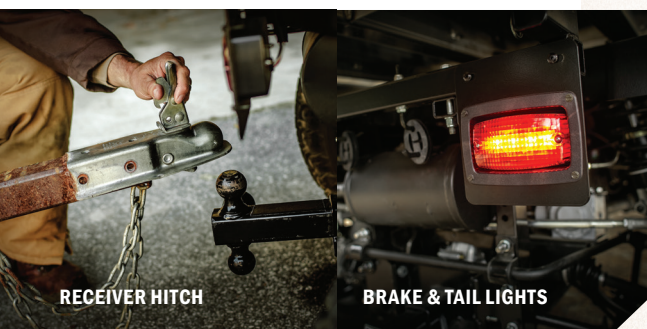

RECEIVER HITCH

BRAKE & TAIL LIGHTS



ALUMINUM BED (OPTIONAL)

## OPTIONS & ACCESSORIES

- Mud Tires (25x10-12)
- Brushed Aluminum Cargo Bed (14.9 cu ft)
- Black Aluminum Cargo Bed (10 cu ft)
- LED Headlights
- 4-Way Turn Signals
- Premium Brush Guard
- Hitch
- Winch Kit
- Top Canopy
- Flat Windshield
- Fold Down Windshield
- Hard Cab (with doors)
- Soft Cab
- Rear Protective Screen
- Spray-in Bed Lining
- Strobe Light
- Working Lamp
- Fog / Flood Lamp
- Spark Arrestor
- Side Mirrors
- Fire Extinguisher
- Front CV Guard Kit
- Skid Plate
- Clutch Cover

BODY & CHASSIS	
FRAME	Welded Steel with DuraShield™ Powder Coat
BODY & FINISH	Injection Molded TPO (front), Steel. Base Coat/Clear Coat (rear)
STANDARD COLOR	Black
DIMENSIONS	
OVERALL LENGTH	115.5 in (293.4 cm)
OVERALL WIDTH	54.5 in (138.4 cm)
OVERALL HEIGHT	76 in (193 cm)
WHEEL BASE	81.5 in (207 cm)
FRONT WHEEL TRACK	43.38 in (110 cm)
REAR WHEEL TRACK	44.38 in (113 cm)
GROUND CLEARANCE	7 in (17.8 cm)
CARGO BOX CAPACITY	9.6 cu ft (0.27 m³)
POWER	
POWER SOURCE	4-cycle, 43.9 ci (720 cc), EFI
VALVE TRAIN	V Twin Cylinder OHV
HORSEPOWER (KW)	28 hp (20.8 kW) Rated
ELECTRICAL SYSTEM	Starter/Generator, Solid-State Regulator
BATTERY (QTY/TYPER)	One 12 Volt Maintenance Free
KEY OR PEDAL START	Key Start
AIR CLEANER	Dry Cartridge w/ Pre-Filter
LUBRICATION	Pressurized Oil System
OIL FILTER	Spin-On Oil Filter
COOLING SYSTEM	Air Cooled
FUEL CAPACITY	5.3 gallon (20 L) tank
DRIVE TRAIN	Automatic, Continuously Variable Transmission (CVT) Manual Locking Differentials (front and rear)
TRANSAXLE	Differential with Helical Gears, Ground Speed Governor, Forward/Reverse
GEAR SELECTION	Dash Mounted Forward-Neutral-Reverse
REAR AXLE RATIO	14.38:1 (forward); 14.36 (reverse)
PERFORMANCE	
SEATING CAPACITY	2 Person
CURB WEIGHT	1370 lb (621 kg)
BED LOAD CAPACITY	800 lb (363 kg)
VEHICLE LOAD CAPACITY	1200 lb (544 kg)
SPEED	25 mph ± 1 mph (40 kph ± 1.6 kph)
TOWING CAPACITY	1200 lb (544 kg)
SAFETY	3-Point Seatbelts and Rollover Protection System (ROPS)
STEERING & SUSPENSION	
STEERING	Self-Compensating Rack and Pinion
FRONT/REAR SUSPENSION	Independent MacPherson Strut
SERVICE BRAKE	4-Wheel Hydraulic Disc Brakes
PARKING BRAKE	Hand Operated
FRONT/REAR TIRES	Terra-Trac 25x10-12